


System

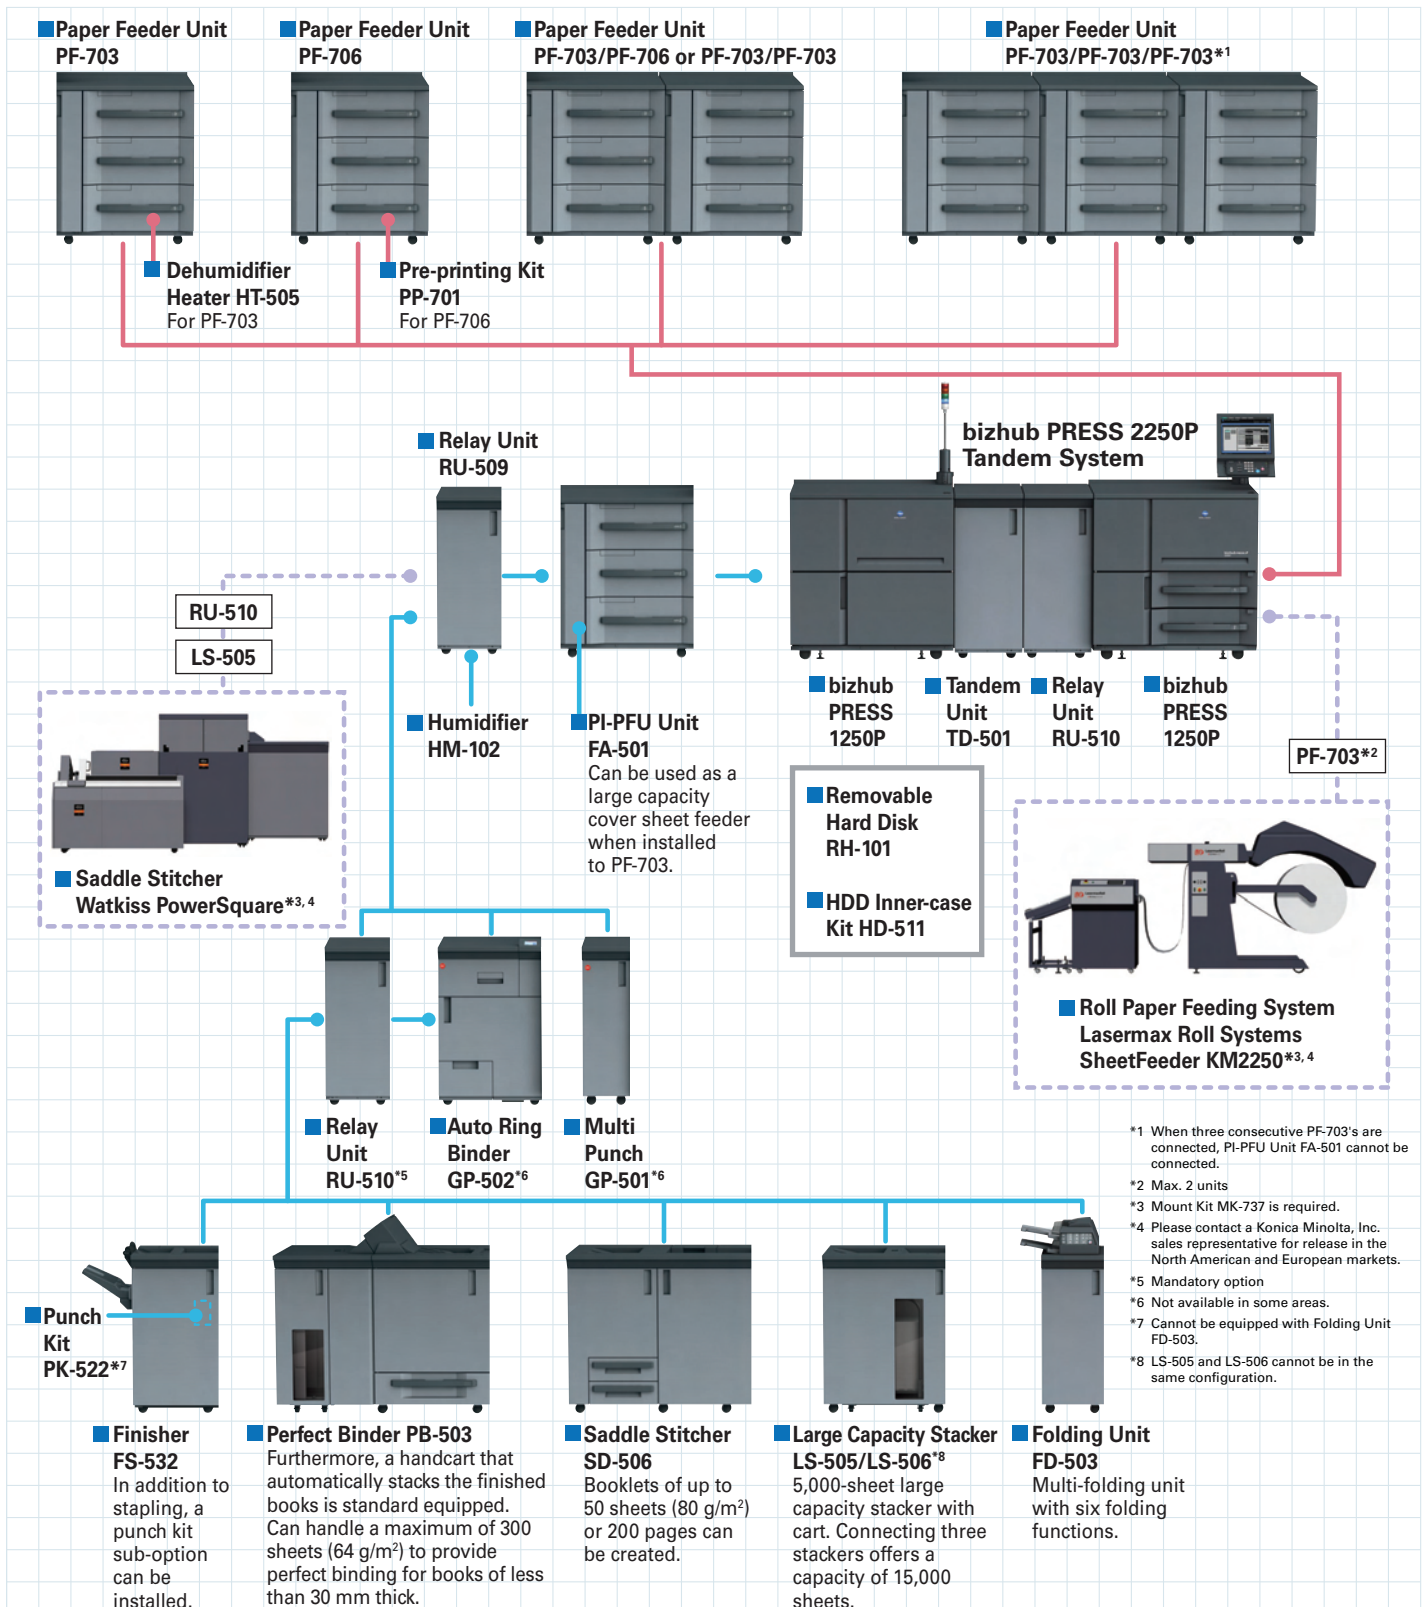

*1 When three consecutive PF-703's are connected, PI-PFU Unit FA-501 cannot be connected.
 *2 Max. 2 units
 *3 Mount Kit MK-737 is required.
 *4 Please contact a Konica Minolta, Inc. sales representative for release in the North American and European markets.
 *5 Mandatory option
 *6 Not available in some areas.
 *7 Cannot be equipped with Folding Unit FD-503.
 *8 LS-505 and LS-506 cannot be in the same configuration.

Specifications

bizhub PRESS 2250P General Specifications

Type	Console	
Resolution	Print	1,200 × 1,200 dpi
Gradation	256	
Memory Capacity	DIMM	768 MB
	HDD	250 GB
Image position accuracy*1 (Front-to-back registration accuracy)	Front-to-back shift amount (XY component)	0.6 mm or less
Output Size (S: Short edge feed <input type="checkbox"/>)	SRA3, A3 to B5, A5S, Tab paper, Custom (182×139 to 324×463 mm)	
Warm-Up Time	460 sec. or less	
Paper Capacity (80 g/m ²)	Standard	1,500 sheets × 2
Paper Weight	Standard	40 to 300 g/m ² (Limitations to paper types apply)
	Option	40 to 350 g/m ² (Only available for middle tray of PF-703 and PF-706)
Power Requirements	220 to 240 V/25 A (50 to 60Hz)	
Max. Power Consumption*2	12 kW or less	
Dimensions [W] × [D] × [H]	2,815 × 910 × 1,020 mm (111" × 35-3/4" × 40-1/4")*3	
	5,450 × 910 × 1,454 mm (214-3/4" × 35-3/4" × 57-1/4")*4	
Weight	768 kg (1,693-1/4 lb)*3	
Space Requirements [W] × [D]	3,000 × 2,060 mm (118-1/4" × 81-1/4")*3	

*1 Prerequisites: 1. Must be a rectangular piece of paper that is uniform in size.
2. Image position adjustment has been made to match the paper.

*2 PF-703 + PF-703 + PF-703 + bizhub PRESS 1250P + RU-510 + TD-501 + bizhub PRESS 1250P + RU-509 + HM-102 + RU-510 + FD-503 + SD-506 + PB-503 + FS-532

*3 bizhub PRESS 2250P (bizhub PRESS 1250P + RU-510 + TD-501 + bizhub PRESS 1250P)

*4 PF-730 + bizhub PRESS 1250P + RU-510 + TD-501 + bizhub PRESS 1250P + RU-510 + LS-505 + FS-532

Printer Specifications (Standard)

Type	Embedded	
CPU	Pentium G6950 2.8 GHz	
Memory	2 GB	
HDD	250 GB 3.5 inch SATA	
Print Speed	250 ipm (A4/Letter), 140 ipm (A3), 136 ipm (Ledger)	
Print Resolution	1,200 × 1,200 dpi, 600 × 600 dpi	
PDL	PCL5e/6, PostScript3 (3019), PDF Ver.1.7, TIFF Ver. 6 Emulation, PPM (Ver.2)	
Protocol	TCP/IP, IPX/SPX (NDS support), SMB (NetBEUI), IPP, EtherTalk	
Support OS	PCL	Windows Server 2003 Standard / Enterprise, Windows Server 2003 Standard (x64) / Enterprise (x64), Windows Server 2008 / 2008 (x64) / 2008R2 (x64), Windows Server 2012 / 2012 (x64), Windows Vista / Vista (x64), Windows 7 / 7 (x64), Windows 8 / 8 (x64), Windows 8.1 / 8.1 (x64)
	PS3	Windows Server 2003 Standard / Enterprise, Windows Server 2003 Standard (x64) / Enterprise (x64), Windows Server 2008 / 2008 (x64) / 2008R2 (x64), Windows Server 2012 / 2012 (x64), Windows Vista / Vista (x64), Windows 7 / 7 (x64), Windows 8 / 8 (x64), Windows 8.1 / 8.1 (x64), Mac OS X 10.6, X 10.7, X 10.8, X 10.9 CUPS (by PS PPD)
Fonts	PCL	80 fonts
	PS3	136 fonts
Interface	10Base-T/100Base-TX/1000Base-T, USB2.0 (Hi-Speed)	

Options

■ Tandem Unit TD-501



Type	Console	
Supported speed	125 ipm	
Functions	Paper alignment correction function	Corrects the paper alignment when the paper's leading edge from the paper loop comes into contact with the conveyance roller, then conveys it to Main Unit 2.
	Paper purge function	When a paper jam occurs downstream from TD-501, the remaining paper upstream of TD-501 will be discharged from TD-501.
Productivity	100% for all modes	
Paper size	Complies with the tandem system specification (95×133 to 330.2×488 mm)	
Paper Weight	40 to 350 g/m ²	
Paper Type	Plain, Fine, Coloured, Coated, Tab Paper, Transparency, Pre-printed paper, Blank Insert, Embossed2 (Embossed paper), Book/News, Embossed (Rough paper)	
Power Source	Supplied from the main unit	
Power Consumption	110 W	
Dimensions [W] × [D] × [H]	410 × 723 × 1,020 mm (16-1/4" × 28-1/2" × 40-1/4")	
Weight	48 kg (105-3/4 lb)	

■ Relay Unit RU-510



Through conveyance function	Paper Size	95×133 to 331×488 mm
	Paper Weight	40 to 350 g/m ²
Reversing function	Paper Type	Plain, Fine, Coated, Recycled paper, Envelope, Embossed
	Paper Size	95×133 to 331×488 mm
Multi-sheet function	Paper Weight	40 to 300 g/m ²
	Paper Type	Plain, Fine, Coated, Recycled paper, Embossed
Power Source	Paper Size	95 × 133 to 331 × 488 mm
	Paper Weight	40 to 216 g/m ²
Dimensions [W] × [D] × [H]	Paper Type	Plain, Fine, Coated, Recycled paper, Embossed
	Weight	Approx. 36 kg (79-1/4 lb)

* Mandatory option

■ Relay Unit RU-509



Paper Size (S: Short edge feed <input type="checkbox"/>)	SRA3, A3, B4, A4, A4S, SRA4, SRA4S, B5, B5S, A5, A5S, B6S, A6S, 13"×19", 12"×18", 11"×17", 8-1/2"×14", 8-1/2"×11", 8-1/2"×11"S, 9"×11", 5-1/2"×8-1/2", 7-1/4"×10-1/2", 7-1/4"×10-1/2"S, Custom (100×140 to 330×487 mm)
Paper Weight	64 to 350 g/m ² (Reversed paper feeding: 64 to 256 g/m ²)
Power Source	AC 220 to 240 V
Dimensions [W] × [D] × [H]	410 × 735 × 1,020 mm (16-1/4" × 29" × 40-1/4")
Weight	Approx. 60 kg (176-1/4 lb)

■ Folding Unit FD-503



The number of holes, diameter, pitch	2 holes: Diameter 6.5 (hole pitch: 80mm), 4 holes: Diameter 6.5 (hole pitch: 80mm)	
Fold Types	Centre-fold, Three fold-in, Three fold-out, Double parallel, Z-fold, Gatefold	
Paper Size (S: Short edge feed <input type="checkbox"/>)	2-hole Punch	A3, B4, A4, A4S, B5, B5S, A5, A5S, SRA4S, 12" × 18", 11" × 17", 8-1/2" × 14", 8-1/2" × 11", 8-1/2" × 11"S, 9" × 11", 8K, 16K, 16KS, 7-1/4" × 10-1/2", 7-1/4" × 10-1/2"S, Tab Paper
	4-hole Punch	A3, B4, A4, B5, 12" × 18", 11" × 17", 8-1/2" × 14", 8-1/2" × 11", 8K, 16K, 7-1/4" × 10-1/2", Tab Paper
Folding mode	Folding mode	A3, B4, A4, SRA4S, 12" × 18", 11" × 17", 8-1/2" × 14", 8-1/2" × 11"S, 8K, Custom (210×279 to 305×458 mm)
	Post insertion mode	A3, B4, A4, A4S, B5, B5S, A5, SRA3, SRA4, SRA4S, 13" × 19", 12" × 18", 11" × 17", 8-1/2" × 14", 8-1/2" × 11", 8-1/2" × 11"S, 5-1/2" × 8-1/2", 7-1/4" × 10-1/2", 7-1/4" × 10-1/2"S, 8K, 16K, 16KS, Wide Paper, Tab Paper, Custom (182×139 to 331×483 mm)
Straight mode	Straight mode	A3, B4, A4, A4S, B5, B5S, A5, A5S, B6S, SRA3, SRA4, SRA4S, 13" × 19", 12" × 18", 11" × 17", 8-1/2" × 14", 8-1/2" × 11", 8-1/2" × 11"S, 5-1/2" × 8-1/2", 5-1/2" × 8-1/2"S, 9" × 11", 7-1/4" × 10-1/2", 7-1/4" × 10-1/2"S, 8K, 16K, 16KS, Wide Paper, Tab Paper, Custom (95×139 to 331×483 mm)
	Sub tray mode	A3, B4, A4, A4S, B5, B5S, A5, A5S, B6S, SRA3, SRA4, SRA4S, A6S, 13" × 19", 12" × 18", 11" × 17", 8-1/2" × 14", 8-1/2" × 11", 8-1/2" × 11"S, 5-1/2" × 8-1/2", 5-1/2" × 8-1/2"S, 9" × 11", 7-1/4" × 10-1/2", 7-1/4" × 10-1/2"S, 8K, 16K, 16KS, Wide Paper, Tab Paper, Custom (95×139 to 331×488 mm)
Paper Weight	Punch	50 to 216 g/m ²
	Folding mode	Centre-fold/Three fold-in/Three fold-out/Z-fold: 50 to 130 g/m ² Double parallel/Gatefold: 50 to 91 gm ²
Power Source	Post insertion mode	50 to 300 g/m ²
	Straight mode	40 to 350 g/m ²
	Sub tray mode	40 to 350 g/m ²
	Weight	Approx. 130 kg (285-1/2 lb)

■ Large Capacity Stacker LS-505 / LS-506



Paper Size (S: Short edge feed <input type="checkbox"/>)	Straight mode	A3, B4, A4, A4S, B5, B5S, A5, SRA3, SRA4, SRA4S, 9" × 11", 13" × 19", 12" × 18", 11" × 17", 8-1/2" × 14", 8-1/2" × 11", 8-1/2" × 11"S, 7-1/4" × 10-1/2", 8K, 16K, Wide Paper, Tab Paper, Custom (210×148 to 331×483 mm)
	Sub tray mode	A3, B4, A4, A4S, B5, B5S, A5, SRA3, SRA4, SRA4S, A6S, 13" × 19", 12" × 18", 11" × 17", 8-1/2" × 14", 8-1/2" × 11", 8-1/2" × 11"S, 5-1/2" × 8-1/2", 8-1/2" × 11"S, 9" × 11", 7-1/4" × 10-1/2", 7-1/4" × 10-1/2"S, 8K, 16K, 16KS, Wide Paper, Tab Paper, Custom (210×148 to 331×483 mm)
Paper Weight	Straight mode	50 to 244 g/m ² (LS-505), 50 to 350 g/m ² (LS-506)
	Sub tray mode	40 to 350 g/m ²
Paper Capacity (80 g/m ²) (S: Short edge feed <input type="checkbox"/>)	Straight mode	5,000sheets: A3, B4, A4, A4S, SRA3, SRA4, SRA4S, 13" × 19", 12" × 18", 11" × 17", 9" × 11", 8-1/2" × 14", 8-1/2" × 11", 8-1/2" × 11"S, 8K, 16K 3,000sheets: Coated paper, more than 380mm paper length 2,000sheets: B5, A5, 7-1/4" × 10-1/2"
	Sub tray mode	200 sheets (Z-fold: 20 sheets, Centre-fold: 40 sheets)
Power Source	Supplied from the main unit	
Dimensions [W] × [D] × [H]	785 × 723 × 1,020 mm (30" × 28-1/2" × 48-1/2")	
Weight	Approx. 110 kg (242-1/2 lb)	

* LS-505 and LS-506 cannot be in the same configuration.


Specifications

■ Saddle Stitcher SD-506



Paper Size (S: Short edge feed)	Saddle stitch/trimming	A3, B4, A4S, B5S, SRA3, SRA4S, 12" x 18", 11" x 17", 8-1/2" x 14", 8-1/2" x 11"S, 7-1/4" x 10-1/2"S, 8K, 16KS, Wide Paper, Custom (182x257 to 324x463 mm)
	Folding	Centre-fold: A3, B4, A4S, B5S, SRA3, SRA4S, 12" x 18", 11" x 17", 8-1/2" x 14", 8-1/2" x 11"S, 7-1/4" x 10-1/2"S, 8K, 16KS, Wide Paper, Custom (182x257 to 324x463 mm) Three fold-in: A4S, 8-1/2" x 11"S
	Straight (sub tray)	A3, B4, A4, A4S, B5, B5S, A5, A5S, B6S, SRA3, SRA4, SRA4S, A6S, 13" x 19", 12" x 18", 11" x 17", 8-1/2" x 14", 8-1/2" x 11", 8-1/2" x 11"S, 5-1/2" x 8-1/2", 5-1/2" x 8-1/2"S, 9" x 11", 7-1/4" x 10-1/2", 7-1/4" x 10-1/2"S, 8K, 16K, 16KS, Wide Paper, Custom (95x139 to 331x488 mm)
Paper Weight		Saddle stitch/trimming: 50 to 244 g/m ² Centre-fold: 50 to 244 g/m ² Three fold-in: 50 to 91 g/m ² Straight (sub tray): 40 to 350 g/m ²
Stacking Capacity		2 to 10 sheet: 50 sets 11 to 20 sheet: 30 sets 21 to 40 sheet: 20 sets 41 to 50 sheet: 15 sets
Stitching Capacity		50 to 81 g/m ² : 50 sheets 82 to 91 g/m ² : 30 sheets 92 to 130 g/m ² : 20 sheets 131 to 161 g/m ² : 15 sheets 162 to 209 g/m ² : 10 sheets 210 to 244 g/m ² : 5 sheets
Staple Position		Variable (90 to 165 mm)
Trimming Capacity		50 sheets x 2 (80 g/m ²)
Fold Type		Centre-fold, Three fold-in
Folding Capacity		Centre-fold: 30 sets Three fold-in: 20 sets
Power Source		Supplied from the main unit
Dimensions [W] x [D] x [H]		1,170 x 775 x 1,020 mm (46" x 30-1/2" x 40-1/4")
Weight		280 kg (617-1/4 lb)

■ Perfect Binder PB-503



Paper Weight		64 to 91 g/m ² (81 to 216 g/m ² for cover sheets)
Paper Size (S: Short edge feed)		A4, B5, A5, A5S, Custom (139x279 to 307x472 mm)
Bound Pages (80 g/m ²)		Approx. 300 sheets max. (less than 30mm thick)/approx. 10 sheets min.
Warm-up Time		20 min.
Power Source		AC 230 V, 50 Hz
Dimensions [W] x [D] x [H]		1,360 x 775 x 1,223 mm (53-1/2" x 30-1/2" x 48-1/4")
Weight		Approx. 270 kg (595-1/4 lb)

■ Finisher FS-532



Paper Weight		Staple mode: 50 to 300 g/m ² Straight/Shift mode: 40 to 350 g/m ²
Paper Size	Staple mode	203x139 to 331x488 mm
	Straight/Shift mode	95x133 (Using small size guides) to 331x488 mm
	Sub tray mode	95x133 (Using small size guides) to 331x488 mm
Paper Capacity (80 g/m ²)		Max. 4,500 sheets (Main + Sub tray)
Stapling mode types		Corner stapling: horizontal, vertical 2-point stapling: centre
Power Source		DC24V ±10%
Dimensions [W] x [D] x [H]		544 x 723 x 1,070mm (21-1/2" x 28-1/2" x 42-1/4")
Weight		74 kg (163-1/4 lb)

■ Punch Kit PK-522



Applicable		Finisher FS-532
Punch Holes		2 holes / 4 holes
Paper Weight		60 to 300 g/m ²
Paper Size (S: Short edge feed)		2 holes: A3, B4, A4, A4S, B5, B5S, A5, A5S 4 holes: A3, B4, A4, B5
Power Source		Supplied from the main unit
Dimensions [W] x [D] x [H]		156 x 592 x 181 mm (6-1/4" x 23-1/4" x 7-1/4")
Weight		4.5kg (10 lb)

■ Auto Ring Binder GP-502



Paper Weight	Bypass Mode	40 to 350 g/m ²
	Punch Mode	75 to 120 g/m ² (163 to 216 g/m ² for cover sheets, 75 to 120 g/m ² for inserter sheets)
Paper Size	Bypass Mode	95 x 133 to 331 x 488 mm
	Punch Mode	A4
Power Source		DC24V / 2.5 A or less
Dimensions [W] x [D] x [H]		655 x 775 x 1,020 mm (25-3/4" x 30-1/2" x 40-1/4")
Weight		183 kg (403-1/2 lb)

*Not available in all areas

■ Multi Punch GP-501



Paper Weight	Bypass Mode	64 to 350 g/m ²
	Punch Mode	75 to 216 g/m ² (Plain paper)
Paper Size	Bypass Mode	95 x 139 to 330 x 488 mm
	Punch Mode	297 x 210 mm
Power Source		230 V, 50 Hz
Dimensions [W] x [D] x [H]		305 x 775 x 1,020 mm (12-1/4" x 30-1/2" x 40-1/4")
Weight		Approx. 80 kg (176-1/4 lb)

*Not available in all areas

■ Paper Feeder Unit PF-703



Paper Size (S: Short edge feed)		SRA3, A3, B4, A4, SRA4S, A4S, B5, B5S, A5, 12" x 18", 11" x 17", 8-1/2" x 14", 8-1/2" x 11", 8-1/2" x 11"S, 9" x 11", Foolscap (8-1/2" x 13", 8-1/4" x 13", 8-1/8" x 13-1/4", 8" x 13") Wide Paper A3W, B4W, A4W, A4SW, B5W, B5SW, A5W 12" x 18"W, 11" x 17"W, 8-1/2" x 11"W, 5-1/2" x 8-1/2"W Tab Paper B5T, A4T, A4ST, B4T, A3T, 8-1/2" x 11"T, 8-1/2" x 11"S,T, 11" x 17"T, 5-1/2" x 8-1/2"T Custom 95x133 (Using small size guides) to 324x483 mm
Paper Type		Plain, Fine, Coated, Book/News, Embossed (Rough paper), Blank Insert, Tab Paper, Pre-printed paper, Transparency, Embossed2 (Embossed paper), Envelope
Paper Weight		40 to 350 g/m ² (801 to 350 g/m ² paper only available for middle tray.)
Paper Capacity (80 g/m ²)	Upper Tray	1,300 sheets
	Middle Tray	1,850 sheets
	Lower Tray	
Power Source		Supplied from the main unit
Dimensions [W] x [D] x [H]		871.5 x 780 x 1,038 mm (34-1/4" x 30-3/4" x 41")
Weight		Approx. 150 kg (330-3/4 lb)

■ Paper Feeder Unit PF-706



Paper Size (S: Short edge feed)		SRA3, A3, B4, A4, SRA4S, A4S, B5, B5S, A5, 12" x 18", 11" x 17", 8-1/2" x 14", 8-1/2" x 11", 8-1/2" x 11"S, 9" x 11", Foolscap (8-1/2" x 13", 8-1/4" x 13", 8-1/8" x 13-1/4", 8" x 13") Wide Paper A3W, B4W, A4W, A4SW, B5W, B5SW, A5W 12" x 18"W, 11" x 17"W, 8-1/2" x 11"W, 5-1/2" x 8-1/2"W Tab Paper B5T, A4T, A4ST, B4T, A3T, 8-1/2" x 11"T, 8-1/2" x 11"S,T, 11" x 17"T, 5-1/2" x 8-1/2"T Custom 95x139 (Using small size guides) to 324x463 mm
Paper Type		Plain, Fine, Book/News, Embossed (Rough paper), Tab Paper
Paper Weight		40 to 350 g/m ² (301 to 350 g/m ² paper only available for middle tray.)
Paper Capacity (80g/m ²)		2,000 sheets x 3 tray
Power Source		Supplied from the main unit
Dimensions [W] x [D] x [H]		809 x 780 x 1,038 mm (31-3/4" x 30-3/4" x 41")
Weight		Approx. 150 kg (330-3/4 lb)



