


System

*1 The WT-511 can not be installed when you connect the PF-602m and the PF-707.
*2 Select one of OC-509 or DF-626. However, it is not for C1070P since it does not have a scanner and the DF function.

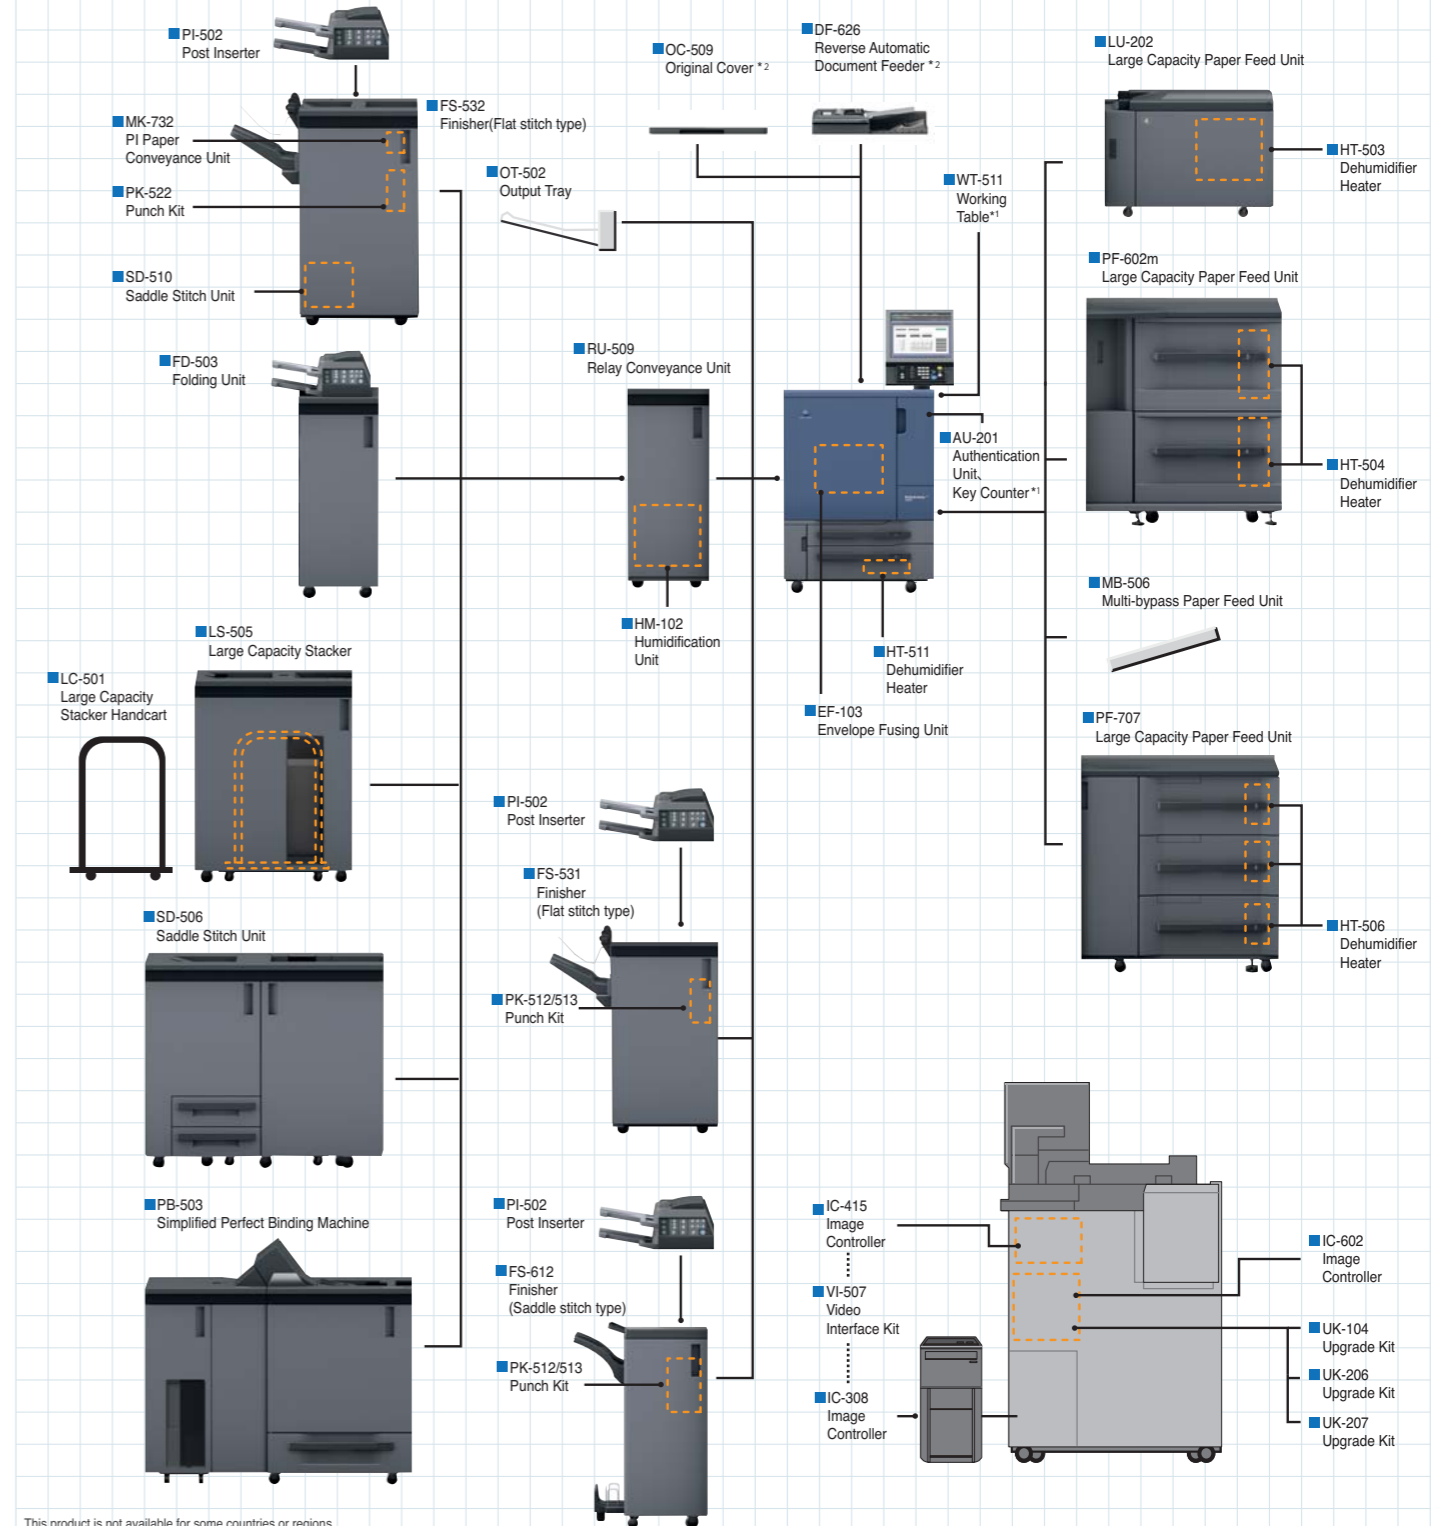

This product is not available for some countries or regions.

Specifications

bizhub PRESS C1070/C1060 General Specifications

Type	bizhub PRESS C1070		bizhub PRESS C1060	
Copy Method	Console type			
Resolution	4-coupled drum tandem laser electrostatic method			
Scan	600 dpi x 600 dpi			
	Print			
Gradation	1,200 dpi (Equivalent to 3,600 dpi) x 1,200 dpi			
CPU	8-bit / 256 Gradation			
System Memory Capacity	Core i5 2400 3.1 GHz Pentium G850 2.9 GHz			
Extended Memory	6 GB			
HDD	System memory capacity can be extended up to 14GB with IC-602 or UK-104.			
Original Type	1.5 TB			
Max. Original Size	Sheet, Book, Solid object			
Max. Printing Area	A3 or 11x17			
Output Size (S: Short Edge Feed <input type="checkbox"/>)	323 mm x 480 mm			
Image Loss	SRA3, A3, B4, A4, B5, 13x19, 11x17, 8 1/2x14, 8 1/2x11.5 1/2X8 1/2S Tab paper (A4, 8 1/2x11)			
	Max. 330 mm x 487 mm, Min. 140 mm x 182 mm			
Warm-Up Time	Multi-bypass(Optional): SRA3, A3, B4, A4, B5, 13x19, 11x17, 8 1/2x14, 8 1/2x11, 5 1/2X8 1/2S Tab paper (A4, 8 1/2x11)			
	Max. 330 mm x 487 mm, Min. 100 mm x 148 mm			
First Copy Out Time	System memory capacity can be extended up to 14GB with IC-602 or UK-104.			
	Max. 4 mm or less for top edge, Max. 4.5 mm or less for bottom edge, Max. 3.0 mm or less for right/left edges			
Continuous Copy Speed	390 seconds or less			
	Colour	7.1 seconds or less (A4, 8 1/2x11)	7.6 seconds or less (A4, 8 1/2x11)	7.6 seconds or less (A4, 8 1/2x11)
Copy Magnification	Black and White			
	Black and White	71 sheets/min. (A4)	61 sheets/min. (A4)	61 sheets/min. (A4)
Tray Capacity	Zoom Magnification			
	Standard	71 sheets/min. (A4)	33 sheets/min. (A3)	33 sheets/min. (A3)
Paper Weight	Fixed Magnification			
	Option	71 sheets/min. (A4)	61 sheets/min. (A4)	61 sheets/min. (A4)
Continuous Copy Count	Inch : x 1.000, x 2.000, x 1.414, x 1.189, x 0.840, x 0.707, x 0.500			
	Power Source	Metric : x 1.000, x 2.000, x 1.414, x 1.189, x 0.840, x 0.707, x 0.500		
Power Consumption	x 0.250 to x 4.000 (Each 0.001 step)			
	Dimensions [W] x [D] x [H]	Tray 1 (500 sheets, 80 g/m ²)		
Weight	Tray 2 (1,000 sheets, 80 g/m ²)			
	Option(MB-506)	MB-506 (Multi-bypass, 250 sheets, 80 g/m ²) ^{*1*} PF-602m (3,000 sheets x 2, 80 g/m ²) ^{*1} PF-707 (1,390 sheets x 2, 1,850 sheets x 1, 80 g/m ²) ^{*1} LU-202 (2,500 sheets x 80 g/m ²) ^{*1}		
Power Source	62 g/m ² to 256 g/m ² *3 (plain, Fine, Colour Specific)			
	Option(MB-506)	81 g/m ² to 256 g/m ² *3 (Coated)		
Power Consumption	62 g/m ² to 300 g/m ² (Plain, Fine, Color Specific)			
	Dimensions [W] x [D] x [H]	Up to 9,999 sheets		
Weight	Inch: AC208 to 240V 21A 60 Hz			
	Power Source	Metric: AC220 to 240V 20A, 50 Hz / 60 Hz		
Power Consumption	Inch: 4,900W or less (Main body only)			
	Dimensions [W] x [D] x [H]	Metric: 4,700W or less (Main body only)		
Weight	760 mm ^{*4} x 903 mm ^{*5} x 1,073 mm ^{*6}			
	Power Source	29.92 ^{*4} x 35.55 ^{*5} x 42.24 ^{*6} (Main body + Original Cover)		
Power Consumption	Approximately 291 kg / 641 lb (Main body only)			
	Power Source	Up to 9,999 sheets		

*1 MB-506, PF-602m, PF-707 and LU-202 are the options.

*2 PF-602m and PF-707 are not available when MB-506 is installed.

*3 For paper size A4 or smaller than 8 1/2x11, it is up to 216 g/m².

*4 Excluding the control panel, output tray, work table.

*5 Including the rear duct.

*6 Height to the top of the original cover excluding the control panel.

bizhub PRESS C1070/C1060 Printer Controller Image Controller IC-308

Type	Server	
CPU	Conforms with main unit specification	
Memory	4 GB	
HDD	1 TB	
Page-description Language	Adobe PostScript 3 (3019), PDF 1.7, PPML 2.2, APPE 2.5, PCL5.6 emulation	
Printing Method	TCP/IP, SNMP, SMB, FTP, LPR, IPP, Bonjour	
Applicable OS	Windows XP / Vista / 7 / 8 / Server 2003 / Server 2008 Server 2008*1 MacOSX 10.5 / 10.6 / 10.7 / 10.8	
Interface	10 / 100 / 1000Base-T	
Scanner Resolution	200 / 300 / 400 / 600 dpi	
Data Format	PDF, TIFF, JPEG	
Driver	Twain Plug-in	

*1 Including 64-bit versions.

Image Controller IC-602

Type	bizhub PRESS C1070		bizhub PRESS C1060	
CPU	AIQ to the engine (option)			
Memory	Conforms with main unit specification			
HDD	Max. 14 GB			
	Details: 2 GB + 4 GB (Standard of the main body) + 4 GB (IC-602) + 4 GB (UK-104)		Max. 14 GB Details: 2 GB + 4 GB (Standard of the main body) + 4 GB (IC-602) + 4 GB (UK-104)	
Page-description Language	Max. 2 TB			
	Details: 500 GB x 3 (Standard of the main body) + 500 GB (UK-104)		Max. 2 TB Details: 500 GB x 3 (Standard of the main body) + 500 GB (UK-104)	
Printing Method	Adobe PostScript3 (PS3019), PDF direct print (PDF version 1.7), APPE (version 2.6) (UK-104 or UK-207 is required), PDF/VT (version 2) (UK-104 or UK-207 is required), TIFF direct print (TIFF version 6 compliance), PPML (version 2.2), PCL-5c compatible, PCL XL (PCL6 version 3) compatible			
	Pserver (IPX/SPX), LPD / LPR (TCP/IP), IPP (TCP/IP), AppleTalk (EtherTalk), Bonjour (TCP/IP), Web service printing (TCP/IP), NPrinter / RPrinter (IPX/SPX), Raw Port (TCP/IP), SMB			
Applicable OS	PS Plug-in			
	Windows XP / Server 2003 / Vista / Server 2008 / 7 / 8 / Server 2012*1 MacOSX 10.5 / 10.6 / 10.7 / 10.8 (PPC/Intel)		PS PPD*2	
Interface	Windows XP / Server 2003 / Vista / Server 2008 / 7 / 8 / Serv er 2012*1 Linux CUPS			
	Ethernet (1000BASE-T / 100Base-TX / 10Base-T) with IPv6, USB			
Scanner Resolution	200 / 300 / 400 / 600 dpi			
Data Format	PDF, TIFF, JPEG, XPS			
Driver	HDD Twain Driver, Real Time Mode Twain Driver			

*1 Includes 64-bit.

*2 WHQL is not obtained for the PS PPD driver

Image Controller IC-415

Type	Embedded	
CPU	Conforms with main unit specification	
Memory	2 GB	
HDD	500GB SATA	
Page-description Language	Adobe PostScript3 (PS3019), PDF 1.7, PCL 5/6 emulation	
Printing Method	TCP/IP, SNMP, SMB, FTP, LPR, IPP, Bonjour	
Applicable OS	Windows XP / Vista / 7 / 8 / Server 2003 / Server 2008*1 MacOSX 10.5 / 10.6 / 10.7 / 10.8	
Scanner Resolution	200 / 300 / 400 / 600 dpi	
Data Format	PDF, TIFF, JPEG	
Driver	Twain Plug-in	

*1 Including 64-bit versions.

Options

Reverse Automatic Document Feeder DF-626

Paper Type	Normal original mode	Simplex original mode: 35 g/m ² to 210 g/m ² Duplex original mode: 50 g/m ² to 128 g/m ²
Capacity	Mixed original mode	Simplex original mode, Duplex original mode: 50 g/m ² to 128 g/m ²
Paper Size		A3, B4, A4, B5, A5, B6S, 11x17, 8 1/2x11
Scan Speed (A4)		100 sheets (80 g/m ²) Scan Resolution: 600 dpi 42 sheets/min. Scan Resolution: 300 dpi 70 sheets/min.
Power Source		Supplied from the machine
Dimensions [W] x [D] x [H]		600 mm x 575 mm x 130 mm / 23.62" x 22.64" x 5.12"
Weight		Approximately 16.7 kg / 36.82 lb

Multi-bypass Paper Feed Unit MB-506

Paper Weight	62 g/m ² to 300 g/m ²
Paper Size	Max. 330 mm x 487 mm, Min. 100 mm x 148 mm
Tray Capacity	250 sheets (80 g/m ²)
Power Source	Supplied from the main body
Power Consumption	Max. 28W or less
Dimensions [W] x [D] x [H]	485 mm x 503 mm x 327 mm 19.09" x 19.8" x 12.87" (Max. dimensions of the whole unit)
Weight	Approximately 4.2 kg / 9.26 lb

Envelope Fuser Unit EF-103

Envelope weight	70 g/m ² to 100 g/m ²
Envelope Size	Paper length in the main scan direction 100 mm to 245 mm*
	Paper length in the sub scan direction 148 mm to 375 mm
Power Source	Supplied from the main body.
Power Consumption	2430W or less
Dimensions [W] x [D] x [H]	200 mm x 690 mm x 235 mm (7.87"x27.17"x9.25")
Weight	Approximately 16 kg (35.2lb)

* When the paper length is less than 139.7 mm, paper feed assist parts must be connected.

Paper Feeder Unit PF-707

Paper Size (S: Short Edge Feed <input type="checkbox"/>)	SRA3, A3, B4, A4, B5, A5, 13x19, 12x18, 11x17, 9x11, 8 1/2x14, 8 1/2x11 Max. 330.2 mm x 487.7 mm, Min. 100 mm x 140 mm*1 Tab paper (A4, 8 1/2x11)
Paper Type	Plain, Fine, Color, Coated, Envelope*2
Paper Weight	62 g/m ² to 350 g/m ²
Max. Tray Capacity	4,630 sheets (80 g/m ²) Tray (upper / middle): 1,390 sheets Tray (lower tray): 1,850 sheets
Power Source	Inch : 120VAC, Metric : 230VAC
Dimensions [W] x [D] x [H]	996 mm x 772 mm x 1038 mm / 39.21" x 30.39" x 40.87"
Weight	203 kg / 447.4 lb

*1 For the paper whose width is less than 140 mm, use the small size guide.

*2 Only upper tray supports envelopes.

Paper Feeder Unit PF-602m

Paper Size (S: Short Edge Feed <input type="checkbox"/>)	SRA3, A3, B4, A4, B5, A5, 13x19, 12x18, 11x17, 9x11, 8 1/2x14, 8 1/2x11 Tab paper (A4, 8 1/2x11)
Paper Type	Plain paper, High quality paper, Coated paper
Paper Weight	Tray(upper) 62 g/m ² to 256 g/m ² Tray(lower) 62 g/m ² to 300 g/m ²
Max. Tray Capacity	6,000 sheets (80 g/m ² standard paper) = 3,000 sheets x 2 trays
Power Source	Supplied both from the main body.
Max. Power Consumption	DC: 90W or less, AC: 100W or less
Dimensions [W] x [D] x [H]	947 mm x 750 mm x 1,045 mm / 37.28" x 29.53" x 41.14"
Weight	Approximately 170 kg / 374.78 lb

Large Capacity Unit LU-202

Paper Size (S: Short Edge Feed <input type="checkbox"/>)	SRA3, A3, B4, A4, B5, 13x19, 12x18, 11x17, 9x11, 8 1/2x14, 8 1/2x11 Tab paper (A4, 8 1/2x11) Max. 330 mm x 487 mm, Min. 210 mm x 182 mm*1
Applicable Paper	Plain paper, High quality paper, Coated paper: 62 g/m ² to 300 g/m ² *1
Paper Capacity	2,500 sheets (80 g/m ²)*2
Power Source	Supplied both from the main body.
Max. Power Consumption	DC: 70W or less AC: 50W or less (Not including HT-503)
Dimensions [W] x [D] x [H]	710 mm x 477 mm x 477 mm / 27.95" x 25.16" x 18.78"
Weight	Approximately 42 kg / 92.59 lb

*1 Available types of paper weighing 300 g/m² are limited to specific types.

*2 Stacked height 275 mm

Relay Unit RU-509

Paper Size (S: Short Edge Feed <input type="checkbox"/>)	Max. 330 mm x 487 mm, Min. 100 mm x 140 mm
Paper Weight	40 g/m ² to 350 g/m ²
Power Source	Supplied from the machine.
Dimensions [W] x [D] x [H]	410 mm x 735 mm x 1,020 mm / 16-1/4" x 29" x 40-1/4"
Weight	Approximately 60 kg / 176-1/4 lb

Specifications

Paper Humidifier HM-102

Paper Type	Same as the main body.
Power Source	24/5 VDC (Supplied from RU-509)

* For Humidifier ON mode, Envelope or Coated, PrePrinted, Blank Insert Sheet, Embossed, and Embossed2 with the weight under 135 g/m² or less cannot be used.

Finisher FS-531

Paper Weight (Staple Mode)	60 g/m ² to 209 g/m ²
Paper Size (Staple Mode)	Max. 314 mm x 458 mm, Min. 182 mm x 148 mm
Paper Capacity (80 g/m ²)	Non-sort mode, Sort/group mode Staple mode Max. 3,000 sheets(A4, B5, 8 1/2x11)
Stapling Mode Types (Staple Position)	Comer stapling 2 staplings
Power Source	Parallel or diagonal depending on paper size Center spreading 162 mm pitch Supplied from the main body.
Max. Power Consumption	80W or less
Dimensions [W] x [D] x [H]	424 mm* x 656 mm x 990 mm / 16.69"* x 25.82"* x 39" Width including the primary (main) tray (with the edge closed): 674.5 mm / 26.56" Width including the primary (main) tray (with the edge pulled out): 790.5 mm / 31.12"
Weight	Approximately 60 kg / 132.28 lb

* Excluding the primary (main) tray

Finisher FS-612

Paper Weight	Staple / Saddle Stitching / Half-Fold mode	60 g/m ² to 105 g/m ²
Paper Size	Staple mode Saddle stitching mode Half-Fold mode Tri-Folding mode	Max. 314 mm x 458 mm, Min. 182 mm x 140 mm, 182 x 148 mm*1 Max. 314 x 458 mm, Min. 210 mm x 279 mm Max. 314 mm x 458 mm, Min. 210 mm x 279 mm A4S, 8 1/2x11S
Paper Capacity (Main Tray)	Non-sort mode, Sort / Group mode	Max. 2,500 sheets A4, A4S, B5, 8 1/2x11 1,500 sheets
Paper Weight	Saddle Stitching mode	SRA3 *1, A3, B4, 12x18, 11x17, 8 1/2x14
Paper Capacity (Booklet Tray)	Folding mode	Length in the sub scan direction: 299 mm or less: 15 sets with 5 sheets Other than the above: 20 sets with 5 sheets
Paper Weight	Tri-Folding mode	Length in the sub scan direction: 299 mm or less: 25 sets with 3 sheets folding Other than the above: 33 sets with 3 sheets folding
Paper Capacity (Sub Tray) Paper Weight	Tri-Folding mode	50 sets with 1 sheet folding Max. 100 sheets
Max. Power Consumption	Dimensions [W] x [D] x [H]	SRA3, A3, B4, A4, 13x19, 12x18, 11x17, 9x11, 8 1/2x14 Supplied from the main body. 80W or less 424 mm*2 x 656 mm x 990 mm / 16.69"*2 x 25.83"* x 39" Width including the primary (main) tray (with the edge closed): 674.5 mm / 26.56" Width including the primary (main) tray (with the edge pulled out): 790.5 mm / 31.12"
Weight		65kg / 143.3 lb

*1 Non-sort mode only

*2 Excluding the primary (main) tray

Punch Kit PK-512/513

Hole Pitch	PK-512: 80 mm (2 holes / 4 holes), 108 mm (3 holes) PK-513: 21 mm, 70 mm, 21 mm (Swedish 4 holes)
Paper Weight	60 g/m ² to 128 g/m ²
Paper Size (S: Short Edge Feed <input type="checkbox"/>)	PK-512 2 holes: A3, B4, A4, B5, 11x17, 8 1/2x14, 8 1/2x11 3/4 holes: A3, B4, A4, B5, 11x17, 8 1/2x11
Power Source	PK-513 A3, B4, A4, B5
Max. Power Consumption	Supplied from the main body.
Dimensions [W] x [D] x [H]	40W or less
Weight	130 mm x 470 mm x 115 mm / 5.12" x 18.5" x 4.53"
	Approximately 3 kg / 6.61 lb

Large Capacity Stacker LS-505

Paper Size (S: Short Edge Feed <input type="checkbox"/>)	Stacker tray mode Sub tray mode	Max. 331 mm x 483 mm, Min. 210 mm x 148 mm Max. 330 mm x 487 mm, Min. 100 mm x 148 mm
Paper Weight	Stacker tray mode Sub tray mode	50 g/m ² to 244 g/m ² 40 g/m ² to 350 g/m ²
Paper Capacity(80 g/m ²) (S: Short Edge Feed <input type="checkbox"/>)	Stacker tray mode Sub tray mode	Max. 5,000 sheets 200 sheets (Z-Fold: 20 sheets, Centre-Fold: 40 sheets)
Power Source		Supplied from the main unit
Max. Power Consumption		100VAC to 240VAC, 5VDC (supplied from the main body)
Dimensions [W] x [D] x [H]		785 mm x 723 mm x 1,020 mm / 30" x 28-1/2" x 48-1/2"
Weight		Approximately 110 kg / 242-1/2 lb

Finisher FS-532

Paper Weight	Staple mode: 62 g/m ² to 300 g/m ² Straight / Shift mode: 62 g/m ² to 300 g/m ²
Paper Size	Staple mode Straight/Shift mode Max. 330 mm x 488 mm, Min. 203 mm x 148 mm (Using small size guides)
Paper Capacity (80 g/m ²)	Max. 4,500 sheets (Main + Sub tray)
Stapling Mode Types	Corner stapling: Horizontal, Vertical 2-point stapling: Centre
Power Source	Supplied from the machine
Max. Power Consumption	144W or less
Dimensions [W] x [D] x [H]	544 mm x 723 mm x 1,070 mm / 21-1/2" x 28-1/2" x 42-1/4"
Weight	74 kg / 163-1/4 lb

Punch Kit PK-522

Applicable Hole Pitch	Finisher FS-532
Paper Weight	Metric area: 80 mm (2 holes / 4 holes), 21 mm, 70 mm, 21 mm (Swedish 4 holes) Inch area: 70 mm (2 holes), 108 mm (3 holes)
Paper Size (S: Short Edge Feed <input type="checkbox"/>)	60 g/m ² to 300 g/m ² </